


TAG: \_\_\_\_\_

# SUBMITTAL

## Downflow/Horizontal Induced Draft Gas Furnace

**TDD1C100A9541A**  
**ADD1C100A9541A**

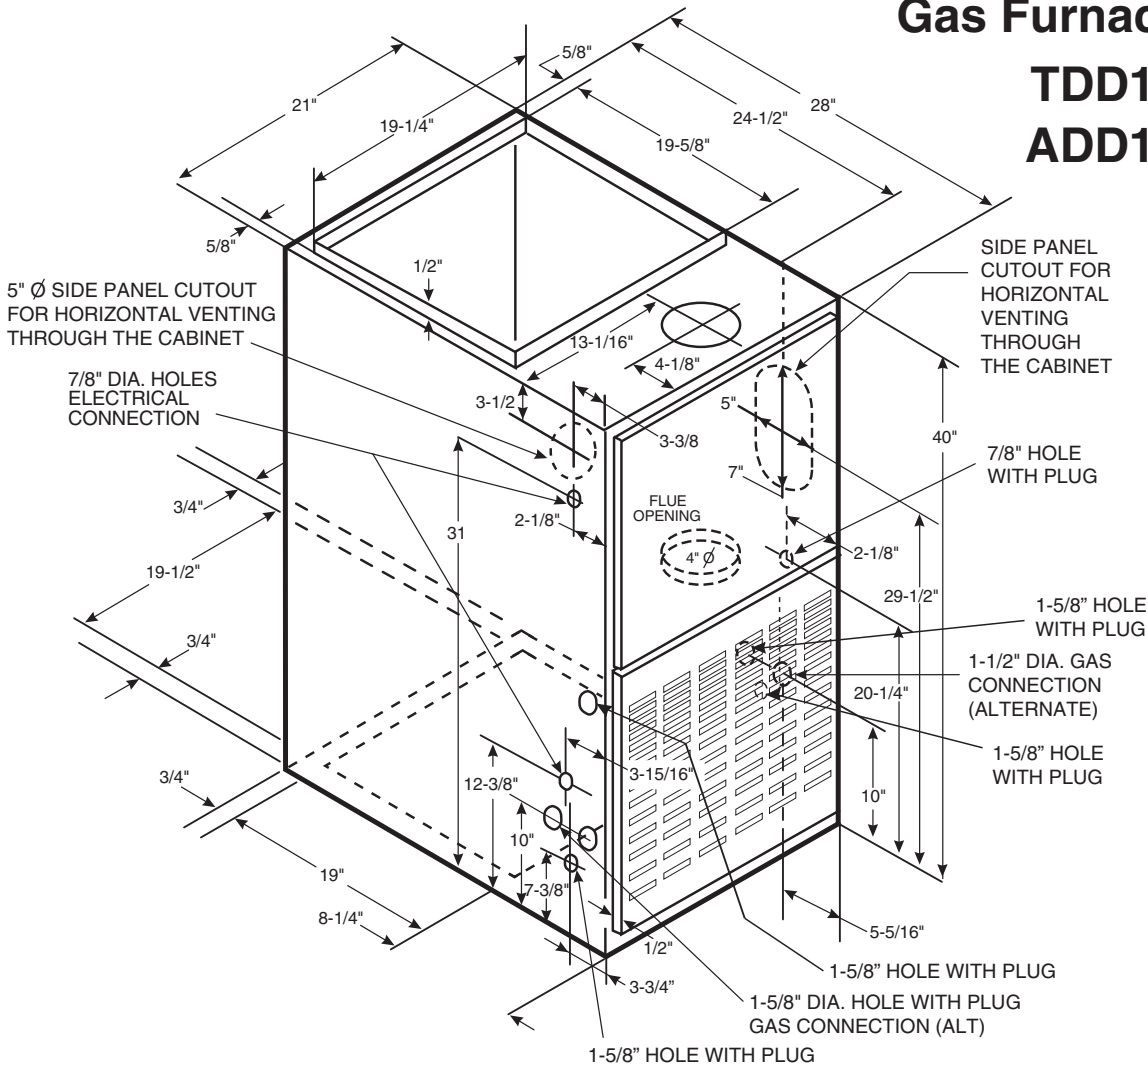

FURNACE AIRFLOW (CFM) VS. STATIC PRESSURE (ins. w.g.)										
MODEL	SPEED TAP	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
TDD1C100A9541A ADD1C100A9541A	4 - HIGH - Black	2165	2113	2060	1995	1929	1842	1755	1674	1593
	3 - MED.-HIGH - Blue	1962	1927	1891	1839	1786	1724	1662	1581	1500
	2 - MED.-LOW - Yellow	1705	1688	1671	1636	1600	1547	1492	1435	1377
	1 - LOW - Red	1492	1467	1442	1414	1385	1346	1307	1243	1179

CFM VS. TEMPERATURE RISE							
MODEL	CFM (CUBIC FEET PER MINUTE)						
	1200	1300	1400	1500	1600	1700	1800
TDD1C100A9541A ADD1C100A9541A	62	57	53	49	46	44	41

# General Data ①

<b>TYPE</b>	Downflow/Horizontal
<b>RATINGS</b> ②	
Input BTUH	100,000
Capacity BTUH (ICS) ③	81,000
AFUE	80.0
Temp. rise (Min.-Max.) °F.	30 - 60
<b>BLOWER DRIVE</b>	DIRECT
Diameter-Width (In.)	11 x 10
No. Used	1
Speeds (No.)	4
CFM vs. in. w.g.	See Fan Performance
Motor HP	1/2
R.P.M.	1075
Volts/Ph/Hz	115/1/60
<b>COMBUSTION FAN - Type</b>	Centrifugal
Drive - No. Speeds	Direct - 1
Motor HP - RPM	1/50 - 3180
Volts/Ph/Hz	115/1/60
F.L. Amps	1.09
<b>FILTER — Furnished?</b>	No
Type Recommended	High Velocity
Hi Vel. (No.-Size-Thk.)	2 - 16 x 20 - 1in.

<b>VENT COLLAR — Size (in.)</b>	4 Round
<b>HEAT EXCHANGER</b>	
Type-Fired	Alum. Steel
-Unfired	
Gauge (Fired)	20
<b>ORIFICES — Main</b>	
Nat. Gas. Qty. — Drill Size	5 — 45
L.P. Gas Qty. — Drill Size	5 — 56
<b>GAS VALVE</b>	Redundant-Single Stage
<b>PILOT SAFETY DEVICE</b>	
Type	Hot Surface Ignition
<b>BURNERS — Type</b>	Multiport Inshot
Number	5
<b>POWER CONN. — V/Ph/Hz</b> ④	115/1/60
Ampacity (In Amps)	13.4
Max. Overcurrent Protection (amps)	20
<b>PIPE CONN. SIZE (IN.)</b>	1/2
<b>DIMENSIONS</b>	H x W x D
Crated (In.)	41 x 22 x 29-1/2
Uncrated (In.)	40 x 21 x 28-1/2
<b>WEIGHT</b>	
Shipping (Lbs.)/Net (Lbs)	167 / 155

① Central Furnace heating designs are certified to ANSI Z21.47 / CSA 2.3.

② Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet; Ratings should be reduced at the rate of 4% for each 1000 feet above sea level.

③ Based on U.S. Government Standard Tests.

④ The above wiring specifications are in accordance with National Electrical Code; however, installations must comply with local codes.

## Mechanical Specifications

**NATURAL GAS MODELS** — Central heating furnace designs are certified to ANSI Z21.47/CSA 2.3 for both natural and L.P. gas. Limit setting and rating data were established and approved under standard rating conditions using American National Standards Institute standards.

**SAFE OPERATION** — The Integrated System Control has solid state devices, which continuously monitor for presence of flame, when the system is in the heating mode of operation. Dual solenoid combination gas valve and regulator provide extra safety.

**QUICK HEATING** — Durable, cycle tested, heavy gauge **aluminized steel heat exchanger** quickly transfers heat to provide warm conditioned air to the structure. **Low energy power vent blower**, to increase efficiency and provide discharge of gas fumes to the outside, allows common venting with hot water heater.

**BURNERS** — Multi-port, in-shot burners will give years of quiet and efficient service. All models can be converted to **L.P. gas** without changing burners.

**INTEGRATED SYSTEM CONTROL** — Exclusively designed operational program provides total control of furnace limit sensors, blowers, gas valve, flame control and includes self diagnostics for ease of service.

**AIR DELIVERY** — The multispeed, direct-drive blower motor, with sufficient airflow range for most heating and cooling requirements, will switch from heating to cooling speeds on demand from room thermostat. The blower door safety switch will prevent or terminate furnace operation when the blower door is removed. (Fan relay and 35VA control transformer is standard).

**STYLING** — **Heavy gauge steel and "wraparound" cabinet construction** is used in the cabinet with baked-on enamel finish for strength and beauty. The heat exchanger section of the cabinet is completely lined with foil-faced fiberglass insulation. This results in quiet and efficient operation due to the excellent acoustical and insulating qualities of fiberglass.

**FEATURES AND GENERAL OPERATION** — These High Efficiency Gas Furnaces employ a Hot Surface Ignition system, which eliminates the waste of a constantly burning pilot. The integrated system control lights the main burners upon a demand for heat from the room thermostat. Complete front service access.

- a. Low energy power venter.
- b. Vent proving differential switch.

Since Ingersoll Rand has a policy of continuous product and product data improvement, it reserves the right to change specifications and design without notice.

Technical Literature - Printed in U.S.A.

Ingersoll Rand  
6200 Troup Highway  
Tyler, TX 75707



Library	-
Product Section	-
Product	Furnace
Model	TDD1
Literature Type	Submittal
Sequence	-
Date	05/15
File No.	TDD1C100-SUB-1D
Supersedes	TDD1C100-SUB-1C