


TAG: \_\_\_\_\_

# SUBMITTAL

## Downflow/Horizontal Induced Draft Gas Furnace

**TDD1D140A9601A**  
**ADD1D140A9601A**

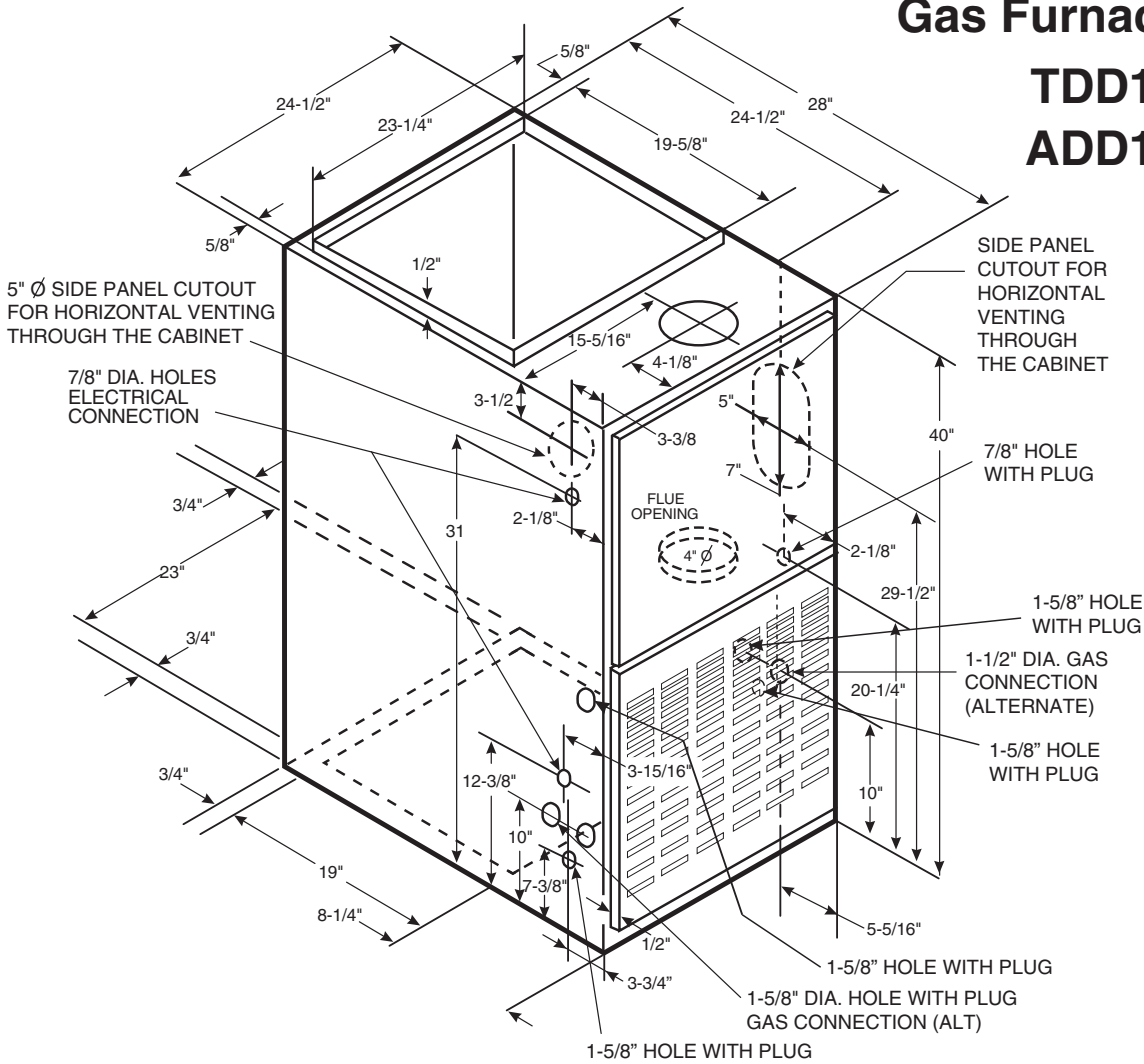

FURNACE AIRFLOW (CFM) VS. STATIC PRESSURE (ins. w.g.)										
MODEL	SPEED TAP	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90
TDD1D140A9601A ADD1D140A9601A	4 - HIGH - Black	2377	2321	2265	2199	2133	2050	1967	1877	1786
	3 - MED.-HIGH - Blue	2115	2081	2046	1992	1938	1872	1805	1727	1649
	2 - MED.-LOW - Yellow	1806	1793	1779	1738	1696	1655	1614	1556	1497
	1 - LOW - Red	1527	1507	1486	1473	1459	1422	1384	1329	1273

CFM VS. TEMPERATURE RISE									
MODEL	CFM (CUBIC FEET PER MINUTE)								
	1500	1600	1700	1800	1900	2000	2100	2200	2300
TDD1D140A9601A ADD1D140A9601A	69	65	61	58	55	52	49	47	45

# General Data ①

<b>TYPE</b>	Downflow/Horizontal
<b>RATINGS</b> ②	
Input BTUH	140,000
Capacity BTUH (ICS) ③	113,000
AFUE	80.0
Temp. rise (Min.-Max.) °F.	45 - 75
<b>BLOWER DRIVE</b>	DIRECT
Diameter-Width (In.)	11 x 10
No. Used	1
Speeds (No.)	4
CFM vs. in. w.g.	See Fan Performance
Motor HP	3/4
R.P.M.	1075
Volts/Ph/Hz	115/1/60
<b>COMBUSTION FAN - Type</b>	Centrifugal
Drive - No. Speeds	Direct - 1
Motor HP - RPM	1/50 - 3180
Volts/Ph/Hz	115/1/60
F.L. Amps	1.09
<b>FILTER — Furnished?</b>	No
Type Recommended	High Velocity
Hi Vel. (No.-Size-Thk.)	2 - 16 x 20 - 1in.

<b>VENT COLLAR — Size (in.)</b>	4 Round
<b>HEAT EXCHANGER</b>	
Type-Fired	Alum. Steel
-Unfired	
Gauge (Fired)	20
<b>ORIFICES — Main</b>	
Nat. Gas. Qty. — Drill Size	7 — 45
L.P. Gas Qty. — Drill Size	7 — 56
<b>GAS VALVE</b>	Redundant-Single Stage
<b>PILOT SAFETY DEVICE</b>	
Type	Hot Surface Ignition
<b>BURNERS — Type</b>	Multiport Inshot
Number	7
<b>POWER CONN. — V/Ph/Hz</b> ④	115/1/60
Ampacity (In Amps)	13.8
Max. Overcurrent Protection (amps)	20
<b>PIPE CONN. SIZE (IN.)</b>	1/2
<b>DIMENSIONS</b>	H x W x D
Crated (In.)	41 x 25-1/2 x 29-1/2
Uncrated (In.)	40 x 24-1/2 x 28-1/2
<b>WEIGHT</b>	
Shipping (Lbs.)/Net (Lbs)	196 / 183

① Central Furnace heating designs are certified to ANSI Z21.47 / CSA 2.3.

② Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet; Ratings should be reduced at the rate of 4% for each 1000 feet above sea level.

③ Based on U.S. Government Standard Tests.

④ The above wiring specifications are in accordance with National Electrical Code; however, installations must comply with local codes.

## Mechanical Specifications

**NATURAL GAS MODELS** — Central heating furnace designs are certified to ANSI Z21.47/CSA 2.3 for both natural and L.P. gas. Limit setting and rating data were established and approved under standard rating conditions using American National Standards Institute standards.

**SAFE OPERATION** — The Integrated System Control has solid state devices, which continuously monitor for presence of flame, when the system is in the heating mode of operation. Dual solenoid combination gas valve and regulator provide extra safety.

**QUICK HEATING** — Durable, cycle tested, heavy gauge **aluminized steel heat exchanger** quickly transfers heat to provide warm conditioned air to the structure. **Low energy power vent blower**, to increase efficiency and provide discharge of gas fumes to the outside, allows common venting with hot water heater.

**BURNERS** — Multi-port, in-shot burners will give years of quiet and efficient service. All models can be converted to **L.P. gas** without changing burners.

**INTEGRATED SYSTEM CONTROL** — Exclusively designed operational program provides total control of furnace limit sensors, blowers, gas valve, flame control and includes self diagnostics for ease of service.

**AIR DELIVERY** — The multispeed, direct-drive blower motor, with sufficient airflow range for most heating and cooling requirements, will switch from heating to cooling speeds on demand from room thermostat. The blower door safety switch will prevent or terminate furnace operation when the blower door is removed. (Fan relay and 35VA control transformer is standard).

**STYLING** — **Heavy gauge steel and "wraparound" cabinet construction** is used in the cabinet with baked-on enamel finish for strength and beauty. The heat exchanger section of the cabinet is completely lined with foil-faced fiberglass insulation. This results in quiet and efficient operation due to the excellent acoustical and insulating qualities of fiberglass.

**FEATURES AND GENERAL OPERATION** — These High Efficiency Gas Furnaces employ a Hot Surface Ignition system, which eliminates the waste of a constantly burning pilot. The integrated system control lights the main burners upon a demand for heat from the room thermostat. Complete front service access.

- Low energy power venter.
- Vent proving differential switch.

Since Ingersoll Rand has a policy of continuous product and product data improvement, it reserves the right to change specifications and design without notice.

Technical Literature - Printed in U.S.A.

Ingersoll Rand  
6200 Troup Highway  
Tyler, TX 75707



Library	-
Product Section	-
Product	Furnace
Model	TDD1
Literature Type	Submittal
Sequence	-
Date	05/15
File No.	TDD1D140-SUB-1B
Supersedes	TDD1D140-SUB-1A